

**6x18w RGBWA+UV 6in1 Wireless
Battery Led Stage Up Par Light**




User Manual



Please keep this manual for future reference

1、LCD display interface

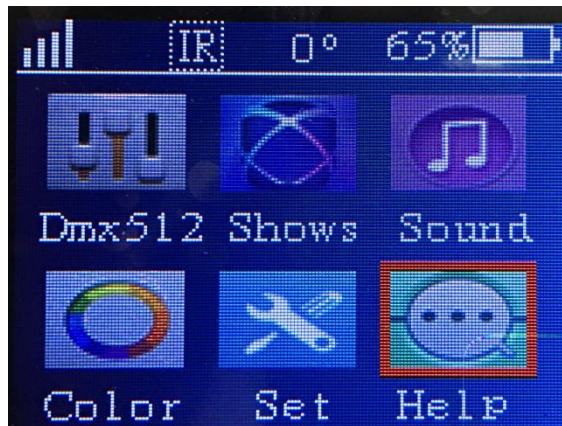

menu



up



down



enter

2、LCD display function mode

Dmx51	Shows	Sound	Color	Set	Help
2					
A001	Auto Color	Sound Mode1	Custom Color	Dmx channel 6CH/10CH	Name: 6 Color
	Auto Fade	Sound Mode2	Static Color	2.4g wireless ON/OFF	Version: V5.0
	Auto Sudden	Sound Mode3		Infrarrd ON/OFF	Dmx Channel:
	Auto Strobe	Sound Mode4		Display backlight 0-100%	Run Time:
	Wifi Mode			Lcd Cose time 1、 Open 2、 5S 3、 10S 4、 15S 5、 30S	User Time:
				Fan speed 1、 Auto seed 2、 Slow seed	Temperature:

				3、 Middle seed 4、 Fast seed	
				Restore factory 8888	
				MANUAL 6666	
				Temperature ON/OFF	
				Battery ON/OFF	
				BackgroundCol or	
				BUZZER(ON/O FF)	

Note: A, menu SHOUS icon WIFI MODE mode, WiFi icon under the display of "NO WIFI" words, this version without mobile app control function, WiFi icon under the display of "LED-XXX" words, this version has mobile phone APP control function, XXX represents 3 numbers, It is also the address of this lamp.

B, menu HELP icon ok, the appearance of information query bar, the upper and lower keys can choose the two microcode to be installed, sweep the installation can be.

C, mobile phone WIFI control procedures are as follows:

1 step Mobile phone first install this software app

2 step Lamp display function switched to WIFI mode (item 5 in SHOW icon mode) 3 Step Open the settings icon on your phone, turn on WIFI and search for wifi addresses with the words beginning with LED.

Such as "LED-XXX", click on the link

4 step Open the installed app of the phone, show the link successfully can be controlled

D, in A001 console mode, press the menu key to adjust the number of image refresh frequency (1200KHZ/4000KHZ/20KHZ)

E, in A001 console mode often press the confirmation key to lower the brightness mixed color value (0-20)

F, the battery charging process, the display will appear charging interface (if you need to charge the side of the lamp, in the charging interface often press the menu key to enter the main operating interface)

F, increase the remote control operation prompt sound, temperature protection function, as well as wired RDM function. (When the temperature reaches more than 75 degrees, the program will

automatically reduce the power of 30 percent, the temperature reaches more than 95 degrees, the program will automatically turn off the lights)

3、 DMX512 control

6CH Mode:

Channel No.	Number Range	Function Declaration
1	0~255	Red dimming
2	0~255	Green dimming
3	0~255	Blue dimming
4	0~255	White dimming
5	0~255	Amber dimming
6	0~255	Purple dimming

10CH mode:

Channel No.	Number Range	Function Declaration
1	0~255	Master dimmer
2	0~255	Red
3	0~255	Green
4	0~255	Blue
5	0~255	White
6	0~255	Amber
7	0~255	Purple
8	0~9	N/A
	10~255	Speed of strobe,slow to fast
9	0~9	Dimmer
	10~29	Color selection: The first 10-channel select color
	30~49	Transition: The first 10-channel control speed
	50~69	Gradient: the first 10-channel control speed
	70~89	Mutation: the first 10-channel control speed
	90~109	Steady Red + strobe: the first 10-channel control speed
	110~129	Steady Green + strobe: the first 10-channel control speed
	130~149	Steady Blue + strobe: the first 10-channel control speed
	150~169	Steady White + strobe: the first 10-channel control speed
	170~189	Steady Amber + strobe: the first 10-channel control speed
190~209	Steady Purple + strobe: the first 10-channel control speed	

	210~229	Sound Hopping
	230~255	Sound Strobe
10	0~255	Ch10 depends on the value of ch9, when ch9 at 10-29,ch10 used for choose color(color chart as following),when ch9 at 30-189,ch9 used for control speed,0-255 slow to fast.

4、 Infrared remote control function:



- 1, dimming the key
- 2, dimming the key
- 3, OFF closed light pause
- 4, ON light running
- 5, R, G, B, W, Y, C keys for the six monochrome
- 6, 9 number keys for 9 kinds of color mixing
- 7, 3 row 3 keys for 6 kinds of monochrome and 6 kinds of monochrome manual dimming switch key
- 8, FLASH key for the color jump function, up and down key to select the speed
- 9, STROBE key for the strobe function, press the up and down key to select

the speed

10, FADE key for the color mutation function, press the up and down key to select the speed

11, SMOOTH key for the voice function, press the up and down keys to select voice mode 1, voice mode 2, voice mode 3

5、 Technical specifications

Power supply:	AC90-250V,50-60Hz
Power consumption:	150W max
LED quantity:	6x25W LEDs (Red 6+Green6+Blue6+white6+Amber6+Purple6)
Service life:	Exceed 50,000 hours
IP grade:	IP44
Working mode:	DMX512 wireless dmx 512.IRC, Standalone, Master/Slave, Sound Active, Color Preset
Battery using time	7-12 hours
Packing size:	14*14*20cm
Weight(net/gross):	2.5kgs/3kgs

6、 WIFI mode of operation



When the connection is successful, exit the phone feature set, open LedHome application software, the first time the need for adding scenes, select the "娱乐" after scene memory, and then select the direct control, color ring control interface will appear, then you can make the appropriate mode. Different mobile operating interface may not be somewhat different, but the functionality is the same.



Innovation, Quality, Performance